



<b>Product range</b>	Compact range
<b>Collection</b>	COMPASS
<b>Code</b>	Depending on configuration – see code chart for details


	STANDARD CONFIGURATION	OPTIONAL CONFIGURATION
<b>Outlet pump*</b>	MAC 4 (DC power: 12V- 24 V)	n/a
<b>Seat &amp; Cover</b>	Thermosetting with Soft Closing System	n/a
<b>Color</b>	White	n/a
<b>Control Panel</b>	Eco rocker switch 	All-in-One 1P SFT / All-in-One 2P SFT / Multiframe 2P SFT / Touch Multifunction SFT 
<b>Water inlet device*</b>	Solenoid (centralized system)	Inlet pump (single system)
<b>Bidet</b>	n/a	
<b>Water consumption</b>	0.5 / 2.0 l (0.1 / 0.5 gal) per flush. The user can easily adjust the water amount.	
<b>Weight</b>	19.5 Kg (43.0 lb) (fully assembled)	

\*see technical data for details

**Technical data:**

WIRE GAUGE SIZE CHART			
Distance from source* is:			
	0-6 mt / 0-20 ft	6-10 mt (20-32 ft)	10-15 mt (33-50 ft)
<b>12V DC</b>	10 AWG (4.17 mm <sup>2</sup> )	8 AWG (6.63 mm <sup>2</sup> )	6 AWG (4.17 mm <sup>2</sup> )
<b>24V DC</b>	16 AWG (2.63 mm <sup>2</sup> )	14 AWG (4.17 mm <sup>2</sup> )	12 AWG (2.63 mm <sup>2</sup> )

\*Distance measured assumed power and ground wires

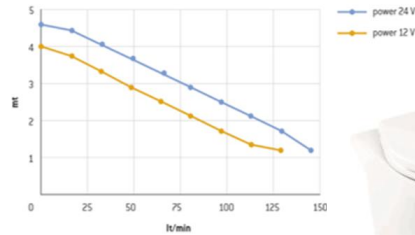

MAC 4 OUTLET PUMP	12V DC	24V DC
<b>Fuse recommended</b>	30A	20A
<b>Pump performance</b>	Max vertical head 4m <b>13.1 ft</b> Max horizontal distance 40 mt <b>131.2 ft</b>	
<b>Outlet Duck bill valve (male)</b>	1.5" / required ID 1.5" (38.5 mm)	

INLET SOLENOID Centralized system	12V DC	24V DC
<b>Power consumption</b>	9.5 W	10 W
<b>Working pressure recommended</b>	3 bar	3 bar
<b>Solenoid Inlet (threaded female)</b>	1/2" or 3/4"	
<b>Solenoid Outlet with inlet hose (barbed male)</b>	15mm	

INLET PUMP Single system (Raw)	12V DC	24V DC
<b>Fuse</b>	8 A	4 A
<b>Pressure</b>	45 PSI - 3 bar	
<b>Water flow</b>	12 l/min <b>3.17 gmp</b>	
<b>Toilet inlet hose fitting (barbed)</b>	20mm	

<b>Notes:</b>	
<b>Box dimension</b>	67cm x 50 cm x 75 cm (LxWxH)
<b>Box weight</b>	25 Kg
<b>Packaging (units/pallet)</b>	12